

KUC24 Undercutter


IDEAL TOOL TO REMOVE BALLAST FROM UNDER ALREADY POSITIONED RAILTRACKS, E.G. TO EXCHANGE DAMAGED SLEEPERS

Suitable for road rail excavators with 14t - 24t operating weight. Can be mounted to existing rotator.

The Undercutter goes under sleepers and rails from the side and cuts out the ballast bed. Damaged sleepers can easily be unscrewed and exchanged before bringing back and tamping the ballast.

Available in three different lengths with cutting depths 2450, 3050 and 3650 mm.


The chain can easily be changed, thus reducing downtimes. Automatic and hydraulic chain tensioning.

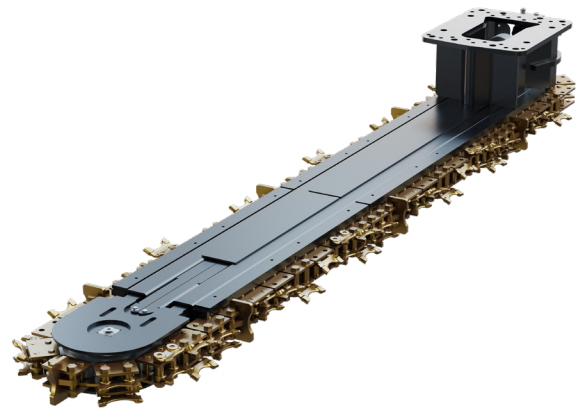

ACCESSORIES:

Bolted adapter AGS KUC

PRODUCT	ARTICLE NUMBER	LENGTH F (mm)	CUTTING DEPTH A max (mm)	CUTTING WIDTH E (mm)	BLADE HEIGHT (mm)	WEIGHT (kg)	HEIGHT C (mm)
KUC24-245	331-24322-000-45	3540	2450			1100	
KUC24-305	331-24322-000-05	4140	3050	630	170	1200	470
KUC24-365	331-24322-000-65	4740	3650			1300	

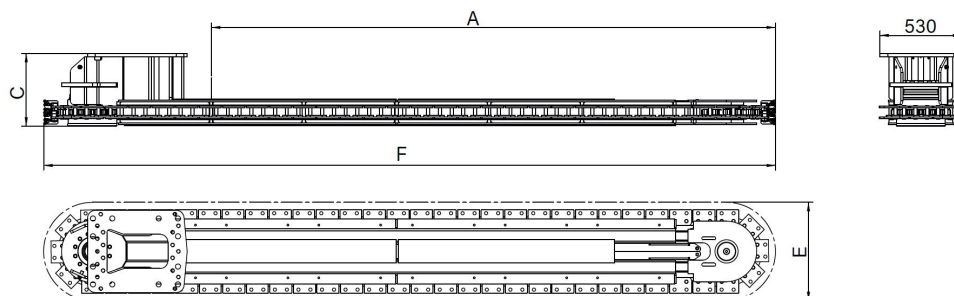

EXCAVATOR REQUIREMENTS

Operating pressure: max 220 bar

Recommended oil flow: 100 - max 120 l/min