


PLA Levelling Beam

LEVELLING MASSES WITHOUT ROLLER - PROVIDES BENEFITS

Levelling beam without roller gives you the ability to move masses and level large areas easily. On the extended cutting edge, material can be taken from storage and placed in the right place in your work area. Folded up at the front edge to prevent cutting. Both PLA and AVB has unique details in their design to facilitate and make work as rational as possible.


Underside in Hardox 450 and wear ribs in Borox 500. Available in several widths and bolted brackets. Standard equipped with fork pockets for easy transport of the beam with forks.

- Easily move masses with the “bucket part”
- Wear steel on the underside of the entire beam increases service life
- Bolted bracket – easy to change between different machines

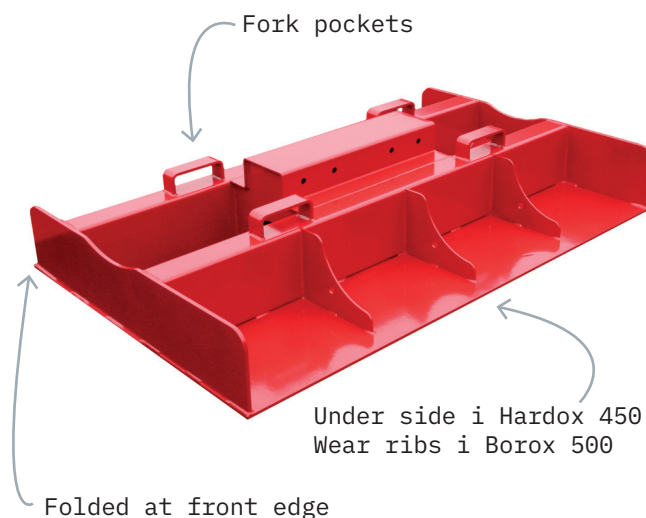

ACCESSORIES:

Bolt-on Bracket AGS SKB, Slope meter, Combined Slope meter/ Laser holder

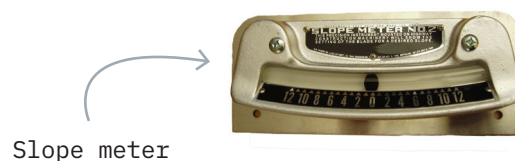

PRODUCT	ITEM NUMBER	WIDTH (mm)	DEPTH (mm)	HEIGHT (mm)	WEIGHT (kg)
PLA 18	333-00213-000-18	1800	1150	240	246
PLA 25	333-00213-000-25	2500	1150	240	297
PLA 25 HD	333-00213-140-25	2500	1150	240	400
SLOPE METER	074-00000-000-00				1
SLOPE METER HOLDER	075-00000-000-00				11

Bolt-on Bracket AGS SKB additional.
Other widths on request.

Video

