


Attachments / **Railway**


Undercutter KUC24

Efficient removal of ballast under tracks

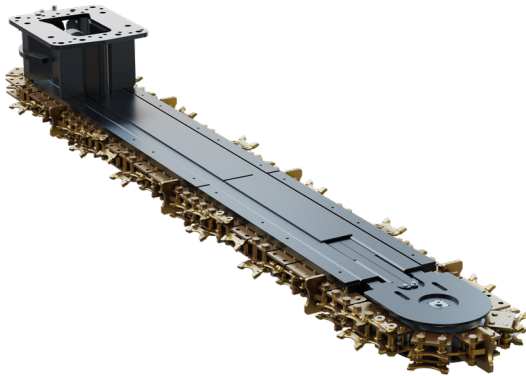

Undercutter KUC24 is an ideal tool for removing ballast under already positioned rail tracks, for example when replacing damaged sleepers. The tool can be mounted on excavators with 14–24 ton operating weight and can be attached to an existing tiltrotator.

The undercutter goes in from the side under the sleepers and rails and cuts out the ballast bed, enabling quick and easy removal of damaged sleepers before the ballast is restored and tamped. It is available in three different lengths with cutting depths 2450, 3050 and 3650 mm. Automatic and hydraulic chain tensioning as well as easy chain replacement minimize downtimes.

 Do you have any questions? Contact us!

 **Mounting**

Can be mounted to a tiltrotator

 **Different lengths**

Available in three different lengths

 **Efficient**

Efficient removal of ballast under sleepers and rails

 **Chain exchange and tensioning**

Easy chain replacement with minimal downtime, automatic chain tensioning

More information

Features

- Cutting depths: 2450, 3050 and 3650 mm
- Automatic and hydraulic chain tensioning
- Can be mounted on rotator

Detailed description

- Weight: 1100–1300 kg (excluding bracket)
- Total length: 3540–4740 mm
- Width: 630 mm
- Blade height: 170 mm

Excavator requirements

- Recommended machine size: 14–24 ton
- Operating pressure: max 220 bar
- Recommended oil flow: 100–120 l/min

Accessories


AGS KUC bolt-on adapter

Product	Item number	Length (mm)	Cutting depth (mm)	Cutting width (mm)	Height (mm)	Operating pressure Max (bar)	Rek oil flow (l/min)
KUC24-245	331-24322-000-45	3540	2450	630	470	220	100 - max 120
KUC24-305	331-24322-000-05	4140	3050	630	470	220	100 - max 120
KUC24-365	331-24322-000-65	4740	3650	630	470	220	100 - max 120

Product description and accessories



Technical specification

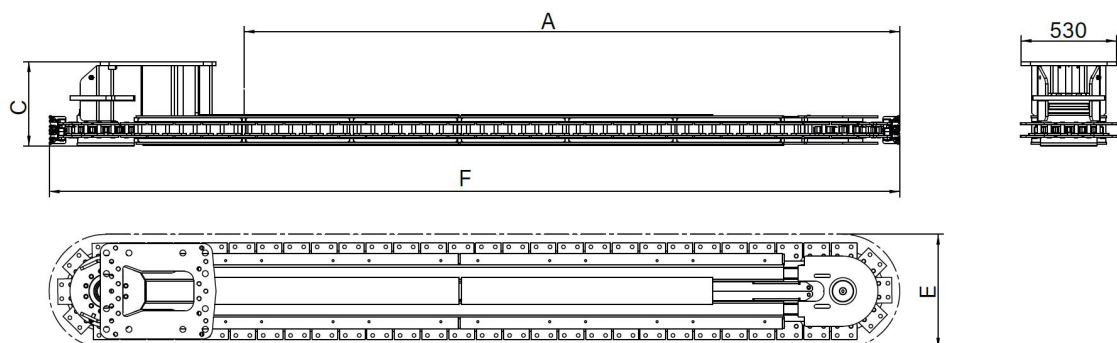

	Cutting depth A (mm)	Height C (mm)	Cutting width E (mm)	Length F (mm)
KUC24-245	2450	470	630	3540
KUC24-305	3050	470	630	4140
KUC24-365	3650	470	630	4740