




See product video

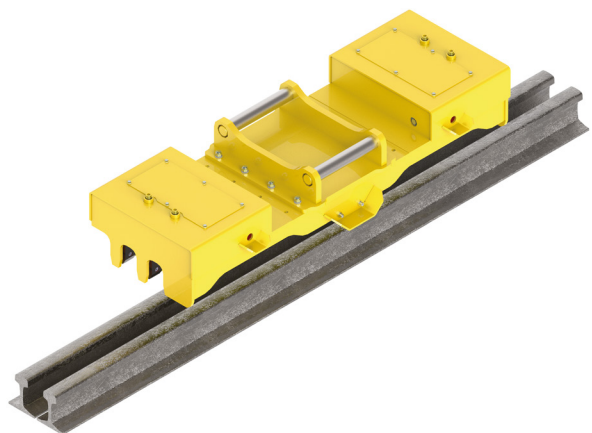


Attachments / **Railway**

Rail Manipulator RLD


Safe and gentle rail handling


Rail Manipulator RLD enables safe and quick lifting of rails up to 18 meters and a total weight of 2500 kg. The tool grips the rail by the waist, eliminating the risk of damage or marks on the rail.


RLD can handle one or two rails at the same time. Recesses allow the rails to be stacked tightly next to each other, and the underside of the rail remains free to be placed on the base before the lift is released. Clear indicators show when the rail is in position for locking and when it is locked, increasing safety during lifting.

 Do you have any questions? Contact us!

 **Safe lifting**
Safe rail handling

 **Gentle handling**
Leaves no marks

 **Efficient lifting**
Can lift two rails at the same time

 **Valve included**
Delivered with pressure limitation valve

More information

Features

- Grips the rail by the waist
- Indicators for correct locking

Detailed description

- Weight: 460 kg (excluding bracket)
- Length: 1800 mm
- Max rail length: 18 meters
- Max load: 2500 kg

Machine requirements


- Recommended machine weight: 15–24 ton
- One double acting hydraulic circuit
- Max pressure: 250 bar
- Oil flow: max 35 l/min

Accessories

Bolt-on Bracket AGS, Fully automatic quick coupler systems from all manufacturers

Product	Item number	Bracket	Load capacity (kg)	Weight excl bracket (kg)
RLD12	309-00382-130-02	S45, S50, S60	2500	460

Product description and accessories

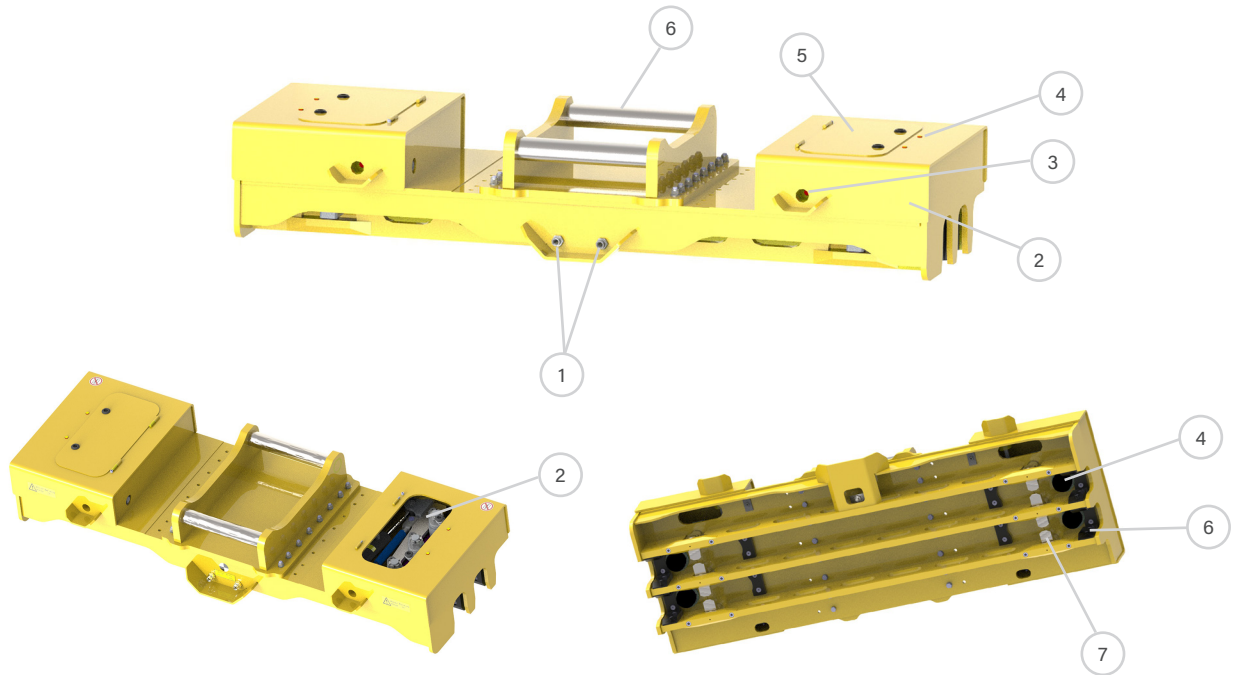

1. Hydraulic connections

2. Linkage housing

3. Lock marker

4. Rubber damper

5. Protection hatch

6. Bolt-on adapter

7. Lock lug

Technical specification

