




See product video

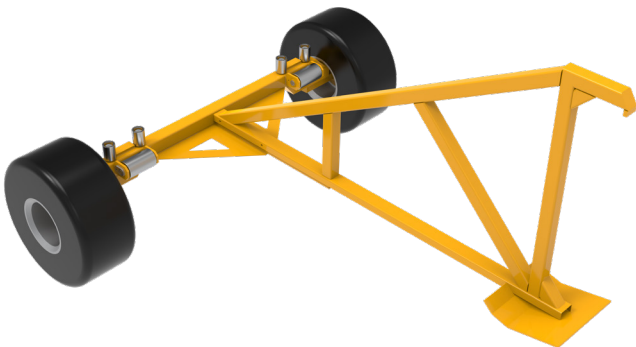

Attachments / **Railway**

Rail Lift on wheels RLF

Safe and stable rail lifting

Rail Lift on wheels RLF is developed and especially adapted for use together with our Sleeper Layer with fastclip module, to lift the rail so that sleepers can be laid underneath. A specially constructed connector device between the Sleeper Layer and Rail Lift ensures that you easily move and steer the Rail Lift on the track in front of the machine.

Bearing-mounted rollers ensure precise rail guidance in both the vertical and lateral directions.

 Do you have any questions? Contact us!


Safe and stable
 Safe lifting and stable rail handling


Smooth handling
 Easy maneuvering in front of the machine


Precise control
 Precise guidance with bearing-mounted rollers

More information

The Rail Lift is now available in two different versions. The original model (Variant A), with wide wheels running on the outside of the rail, provides excellent stability, even when loading the first rail. The newly developed model (Variant B), with four wheels running inside the rail, has a narrower design, allowing it to pass obstacles such as platforms. It is also equipped with adjustable support legs to provide additional stability when loading the first rail.

Features

- Special connector device for Sleeper Layer RUS33 CLF
- Bearing-mounted guide rollers for vertical and lateral guidance
- Adapted for 1435 mm track gauge as standard
- Pneumatic tyres for easy movement on the ballast bed
- No self-drive, the unit is propelled forward when coupled to the RUS33

Detailed description


- Variant A:
- Weight: 515 kg
 - Width: 2840 mm
 - Length: 3450 mm
 - Tyres: 400/60×15.5 MRL
- Variant B:
- Weight: 834 kg
 - Width: 2230 mm
 - Length: 4030 mm
 - Tyres: 215/75R17,5

Machine requirements


- For use in combination with Sleeper Layer RUS33

Product	Item number	Variant	Coupling	Width (mm)	Length (mm)	Wheels	Weight (kg)
RLF	309-00020-090-01	A	Adapted for Sleeper Layer RUS33	2840	3450	Tyre 400/60x15.5 MRL	515
RLF	309-00020-090-99	B	Adapted for Sleeper Layer RUS33	2230	4030	Tyre 215/75R17,5	834

Product description and accessories

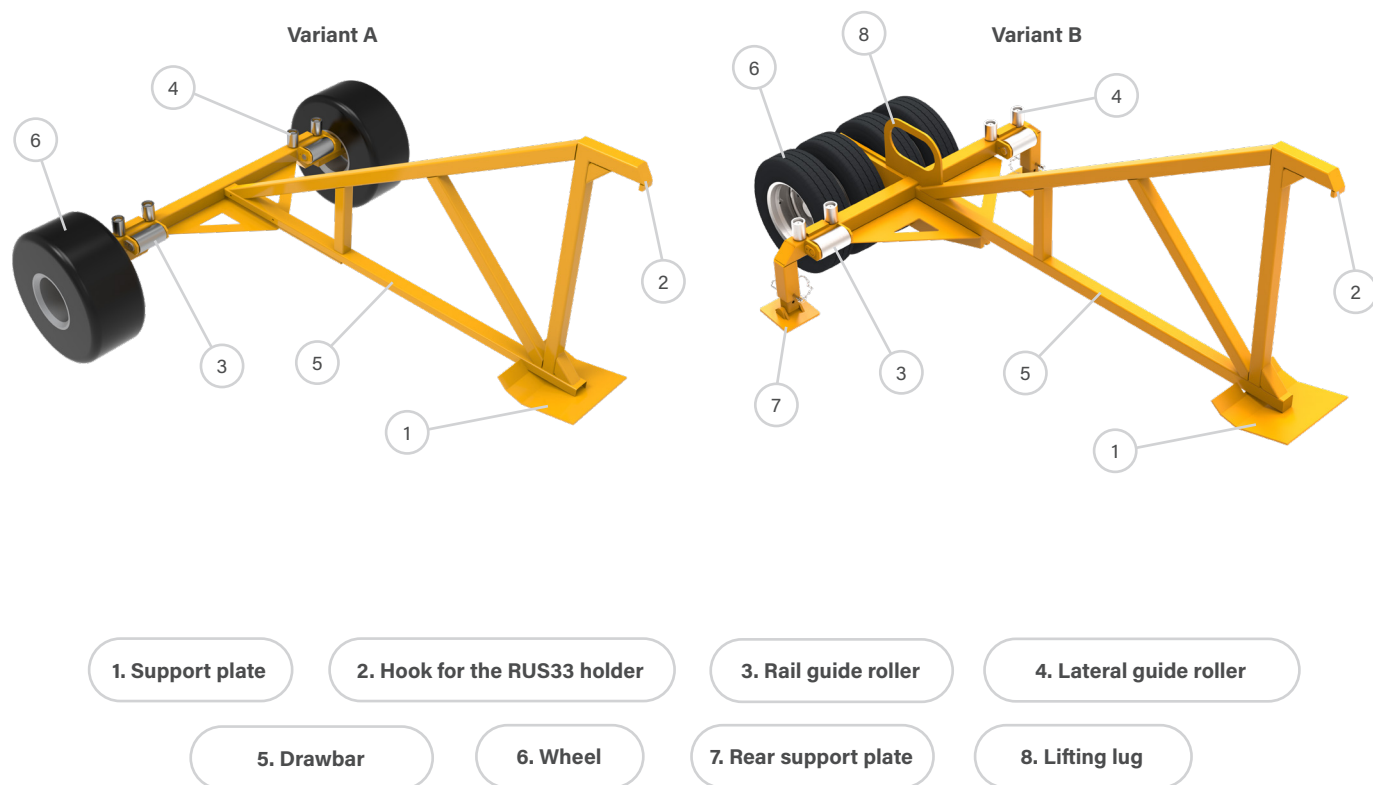

Technical specification

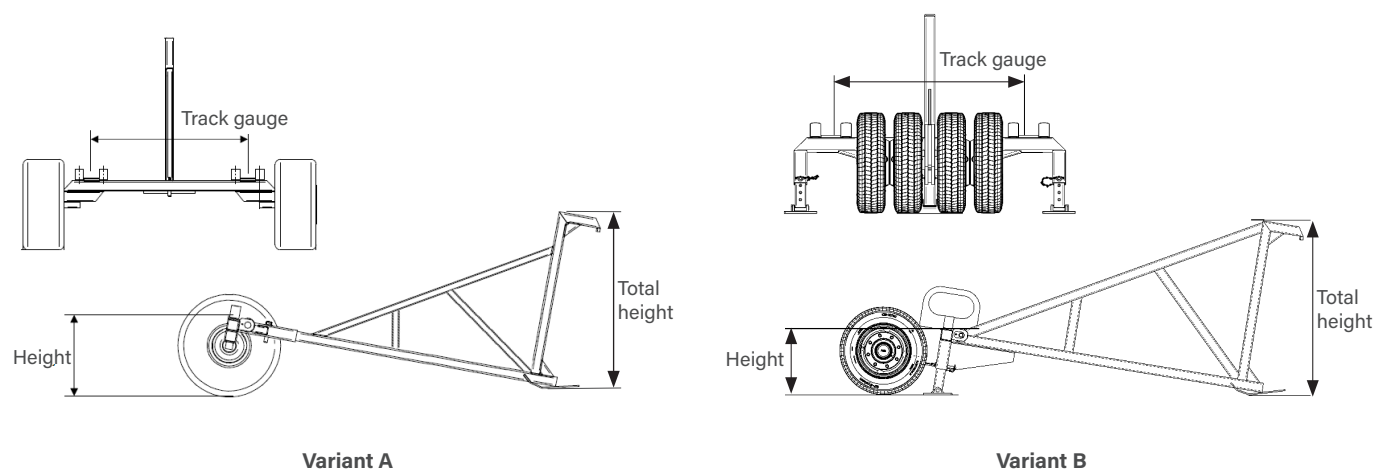

Variant	Track gauge (mm)	Wheel	Weight (kg)	Width (mm)	Height (contact surface) (mm)	Length (mm)	Total height (mm)
A	1435	Tyre 400/60x15,5 MRL	515	2840	700	3450	1500
B	1435	Tyre 215/75R17,5	834	2230	560	4030	1500